

Status Report - UNITHERM (Russian Federation)

Downloaded on: Oct 02, 2026 8:28 AM CET
Published Date : Oct 16, 2024 4:14 PM CET

1. Overview

- ☐ In Operation
- ☐ Under Construction
- ☐ Described in

Link to PRIS --

☒ **New Concept**

Number of Units --

Year --

Reference Plant

Name of Site --

Link to PRIS --

Net Power Output (MWe) 6.6

Gross Power Output (MWe) --

1.1 Introduction

The UNITHERM is a small transportable nuclear power plant (NPP) with a capacity of 30 MW(t) and a rated electrical output of 6.6 MW developed based upon NIKIET’s experience in designing marine nuclear installations. The UNITHERM reactor is intended for electricity supply to urban areas and industrial enterprises in remote regions. UNITHERM adopts a natural circulated primary cooling system and is intended for minimal operational staffing with an option for unattended operation and a centralized regional support facilities monitoring. The UNITHERM design adopts proven technology and operational experience of the WWER type reactors. The design aims for fabrication, assembly and commissioning of the NPP modules to be carried out at factory. The UNITHERM reactor is designed to operate for 20-25 years without refuelling as both a land-based and barge mounted NPP. NPP with UNITHERM may consist of a number of units depending on the purpose and demand of costumers need.

The UNITHERM NPP can be used as a source of energy for the generation of electricity, district heating, seawater desalination and process steam production. In general, the configuration and design of the UNITHERM is sufficiently flexible to be adjusted or modified for different target functions and user requirements, without compromising the underlying principles of the design.

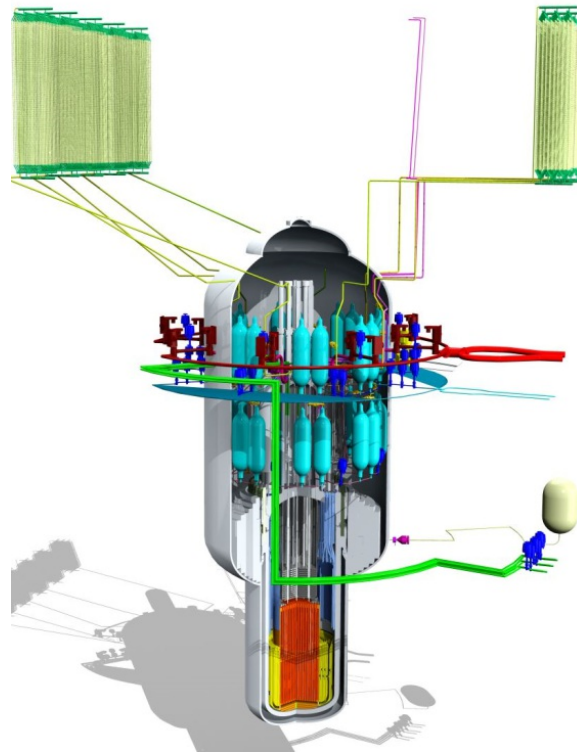


Figure 1. UNITHERM concept

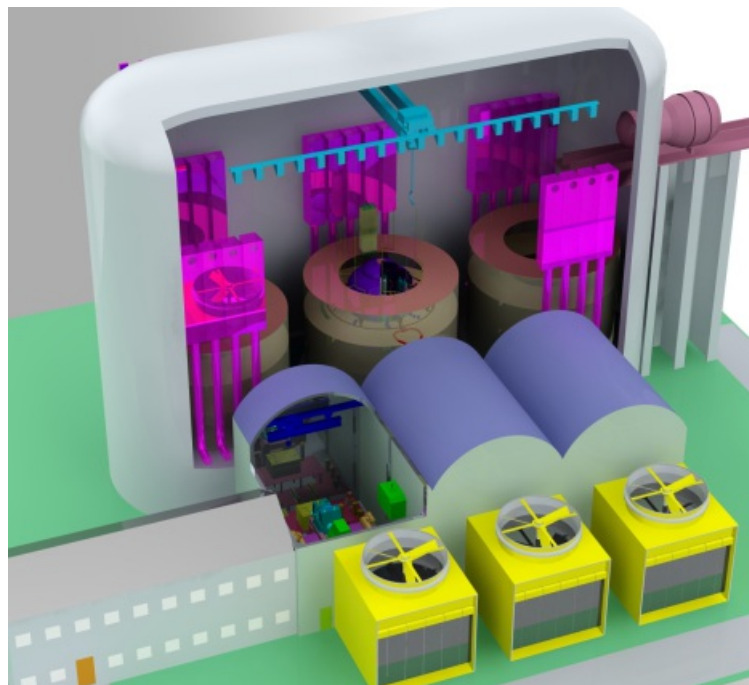


Figure 2. Cut-view of UNITHERM

1.2 Development Milestones

1994	The NPP design on the basis of the UNITHERM concept has become the laureate of the competition on SMR designs established by the Russian Nuclear Society
2012	Technical proposal on the UNITHERM reactor facility (WDR stage)
2015	Technical proposal for a SMR plant based on the UNITHERM reactor

1.3 Design organization or vendor company

1.4 Links to designer/vendor website

1.5 Design Description

NPPs with the UNITHERM reactor are designed for siting in remote regions with less developed infrastructure and where qualified staff for plant operation may not be available. The reactor core life is expected to be equal to the plant lifetime with an estimated time of 20-25 years. The refuelling of the core will not be required during the plant service life.

1.6 Licensing Application Support Documents

1.7 Reactor Unit in PRIS

2. Category Fields

Table 1: ARIS Category Fields

ARIS Category	Value	Units of Examples
Current/Intended Purpose	Commercial – Electric/Non-Electric	e.g. Commercial – Electric/Non-electric, Prototype/FOAK, Demonstration, Experimental
Main Intended Application (once commercial)	Baseload, Non-electric (District heating, seawater desalination and process steam production.)	e.g. Baseload, Dispatchable, Off-grid/Remote, Mobile/Propulsion, Non-electric (specify)
Reference Location	Inland	e.g. On Coast, Inland, Below-Ground, Floating-Fixed, Marine-Mobile, Submerged-Fixed (Other-specify)
Reference Site Design (reactor units per site)		e.g. Single Unit, Dual Unit, Multiple Unit (# units)
Core Coolant	H2O	H2O, D2O, He, CO2, Na, Pb, PbBi, Molten Salts, (Other-specify)

Reactor Core Size (1 core)	Thermal Power < 30 MWth	e.g. Thermal Power < 30 MWth, 30 MWth ≤ Thermal power < 1000 MWth, 1000 MWth ≤ Thermal power ≤ 3000 MWth, Thermal power > 3000 MWth
Reactor Type	PWR	e.g. PWR, BWR, HWR, SCWR, GCR, GFR, SFR, LFR, MSR, ADS
Reactor Size	Microreactor	e.g. PWR, SMR
Neutron Moderator	H2O	e.g. H2O, D2O, He, CO2, Na, Pb, PbBi, Molten Salts, (Other-specify)
NSSS Layout	Integral	e.g. Loop-type (# loops), Direct-cycle, Semi-integral, Integral, Pool-type
Primary Circulation	Natural	e.g. Forced (# pumps), Natural
Thermodynamic Cycle	Rankine	e.g. Rankine, Brayton, Combined-Cycle (direct/indirect)
Secondary Side Fluid	H2O	e.g. H2O, He, CO2, Na, Pb, PbBi, Molten Salts, (Other-specify)
Fuel Form	Fuel Assembly/Bundle	e.g. Fuel Assembly/Bundle, Coated Sphere, Plate, Prismatic, Contained Liquid, Liquid Fuel/Coolant
Fuel Lattice Shape		e.g. Square, Hexagonal, Triangular, Cylindrical, Spherical, Other, n/a
Rods/Pins per Fuel Assembly/Bundle		e.g. #, n/a
Fuel Material Type	Oxide	e.g. Oxide, Nitride, Carbide, Metal, Molten Salt, (Other-specify)
Design Status	Conceptual Design	e.g. Conceptual, Detailed, Final (with secure suppliers)
Licensing Status		e.g. DCR, GDR, PSAR, FSAR, Design Licensed (in Country), Under Construction (# units), In Operation (# units)
Neutron Spectrum	Thermal	e.g. Fast, Thermal

3. Parameter Fields

Table 2: ARIS Parameter Fields

ARIS Parameter	Value	Units of Examples
Plant Infrastructure		
Design Life	30	Years
Lifetime Capacity Factor		%, defined as Lifetime MWe- yrs delivered / (MWe capacity * Design Life), incl. outages
Major Planned Outages		# days every # months (specify purpose, including refuelling)
Operation / Maintenance Human Resources		# Staff in Operation / Maintenance Crew during Normal Operation
Reference Site Design		n Units/Modules
Capacity to Electric Grid	6.6	MWe (net to grid)
Non-electric Capacity		e.g. MW(th) heat at x °C, m3/day desalinated water, kg/day hydrogen, etc.
In-House Plant Consumption		MWe
Plant Footprint	10000	m2 (rectangular building envelope)
Site Footprint		m2 (fenced area)
Emergency Planning Zone		km (radius)
Releases during Normal Operation		TBq/yr (Noble Gases / Tritium Gas / Liquids)
Load Following Range and Speed		x – 100%, % per minute
Seismic Design (SSE)	VIII-IX-MSK 64	g (Safe-Shutdown Earthquake)
NSSS Operating Pressure (primary side)	16.5	MPa(abs), i.e. MPa(g)+0.1, at core outlet
NSSS Operating Pressure (secondary side)		MPa(abs), i.e. MPa(g)+0.1, at secondary side outlet
Primary Coolant Inventory (incl. pressurizer)		kg

Nominal Coolant Flow Rate (primary)		kg/s
Nominal Coolant Flow Rate (secondary)		kg/s
Core Inlet Coolant Temperature	249	°C
Core Outlet Coolant Temperature	330	°C
Available Temperature as Process Heat Source		°C
NSSS Largest Component	RPV	e.g. RPV (empty), SG, Core Module (empty/fuelled), etc.
- NSSS Largest Component Length	9800	mm
- NSSS Largest Component Diameter	2900	mm
- NSSS Largest Component Thickness		mm
- NSSS Largest Component Weight	32	tonne
Reactor Vessel Material		e.g. SS304, SS316, SA508, 800H, Hastelloy N
Steam Generator Design		e.g. Vertical/Horizontal, U-Tube/ Straight/Helical, cross/counter flow
Secondary Coolant Inventory		kg
Pressurizer Design		e.g. separate vessel, integral, steam or gas pressurised, etc.
Pressurizer Volume		m ³ / m ³ (total / liquid)
Containment Type		Dry (single/double), Dry/Wet Well, Inerted, etc.
Containment Volume		m ³
Spent Fuel Pool Capacity and Total Volume		Years of full-power operation / m ³
Non Electric Application	District heating, water desalination, and industrial processes	-
Core Delta Temperature	81	°C
Fuel/Core		

Single Core Thermal Power	30	MW(th)
Refuelling Cycle	200	months or “continuous”
Fuel Material	UO2 particles in a metallic silumin or zirconium matrix, metal-ceramic	e.g. UO2, MOX, UF4, UCO
Enrichment (avg./max.)	19.75	%
Average Neutron Energy		eV
Fuel Cladding Material		e.g. Zr-4, SS, TRISO, E-110, none
Number of Fuel “Units”		Specify as Assembly, Bundle, Plate, Sphere, or n/a
Weight of one Fuel Unit		kg
Total Fissile Loading (initial)		kg fissile material (specify isotopic and chemical composition)
% of fuel outside core during normal operation		Applicable to online refuelling and molten salt reactors
Fraction of fresh-fuel fissile material used up at discharge		%
Core Discharge Burnup	1.15	MWd/kgHM (heavy metal, eg U, Pu, Th)
Pin Burnup (max.)		MWd/kgHM
Breeding/Conversion Ratio		Fraction of fissile material bred in-situ over one fuel cycle or at equilibrium core
Reprocessing		e.g. None, Batch, Continuous (FP polishing/actinide removal), etc.
Main Reactivity Control	Control rods, boron solution	e.g. Rods, Boron Solution, Fuel Load, Temperature, Flow Rate, Reflectors
Solid Burnable Absorber		e.g. Gd2O3
Core Volume (active)		m3 (used to calculate power density)
Fast Neutron Flux at Core Pressure Boundary		n/(cm²*s)
Max. Fast Neutron Flux		n/(cm²*s)
Core Control Rod Absorber		-

Core Soluble Neutron Absorber		-
Safety Systems		
Number of Safety Trains	Active / Passive	% capacity of each train to fulfil safety function
- reactor shutdown	Active/Passive	- / - / -
- core injection	Active/Passive	- / - / -
- decay heat removal	Active/Passive	- / - / -
- containment isolation and cooling	Active/Passive	- / - / -
- emergency AC supply (e.g. diesels)	Active/Passive	- / - / -
DC Power Capacity (e.g. batteries)		Hours
Events in which Immediate Operator Action is required		e.g. any internal/external initiating events, none
Limiting (shortest) Subsequent Operator Action Time		Hours (that are assumed when following EOPs)
Severe Accident Core Provisions		e.g. no core melt, IMMR, Core Catcher, Core Dump Tank, MCCI
Core Damage Frequency (CDF)		x/reactor-year (based on reference site and location)
Severe Accident Containment Provisions		e.g., H2 ignitors, PARs, filtered venting etc.
Large Release Frequency (LRF)		x/reactor-year (based on reference site and location)
Overall Build Project Costs Estimate or Range (excluding Licensing, based on the Reference Design Site and Location)		
Construction Time (nth of a kind)		Months from first concrete to criticality
Design, Project Mgmt. and Procurement Effort		Person-years (PY) [DP&P]
Construction and Commissioning Effort		PY [C&C]
Material and Equipment Overnight Capital Cost		Million US\$(2015) [M&E], if built in USA
Cost Breakdown	%[C&C]/%[M&E]	

- Site Development before first concrete		(e.g. 25/10) (30/40) (20/25) (20/10) (5/15) (-----) (to add up to 100/100)
- Nuclear Island (NSSS)		
- Conventional Island (Turbine and Cooling)		
- Balance of Plant (BOP)		
- Commissioning and First Fuel Loading		
Factory / On-Site split in [C&C] effort		%/% of total [C&C] effort in PY (e.g., 60/40)
Nuclear System		
System Steam Flow Rate		kg/s
System Steam Pressure		MPa
System Steam Temperature		°C
System Feedwater Flow Rate		kg/s
System Feedwater Temperature		°C
Reactor Core		
Active Core Height		m
Equivalent Core Diameter		m
Average Linear Heat Rate		kW/m
Average Fuel Power Density		kW/kgU
Average Core Power Density		MW/m ³
Outer Diameter Of Fuel Rods		mm

4. Plant Layout, Site Environment and Grid Integration

SUMMARY FOR BOOKLET

Reactor Building

The NPP site is limited by perimeter of the protected zone that does not exceed a square of 2 hectares.

The site hosts reactor building for housing reactor(s) which possesses special transport locks for

delivery of the reactor plant for mounting and other equipment necessary during outages and removal of the reactor facility; building to house turbine-generator(s) and some other auxiliary buildings. Turbine-generator assembly for UNITHERM NPP depends on the plant capacity and operation mode requested by its users. The turbine operates using dry saturated steam in the mode of steam outlet backpressure. With consideration of the continuous transfer of 5 % heat to the independent heat removal system, the total efficiency in this case is expected to be ~74 %. High efficiency is achieved from the utilization of low-parameter heat at the turbine exhaust. An electric generator with an output of 6.6 MW(e) in combination with a single-phase intermediate circuit allows to obtain a superheated steam temperature of 285°C under 1.35 MPa.

4.1 Site Requirements during Construction

4.2 Site Considerations during Operation

4.3 Grid Integration

5. Technical NSSS/Power Conversion System Designn

SUMMARY FOR BOOKLET

Nuclear Steam Supply System

Primary circuit system is intended for heat removal from the reactor core and heat transfer to the intermediate circuit fluid inside the intermediate heat exchanger. The system consists of a main circulation train and a pressurizing system. The natural circulation of primary coolant takes place in the primary circuit.

The intermediate circuit system is intended for heat transfer from the intermediate circuit coolant to the secondary coolant (consumer's circuit) inside a steam generator (SG). This system provides an additional localizing safety barrier to protect the heat consumers against the ionizing radiation from radionuclides generated by primary coolant activation, from structural material corrosion products dissolved in the primary coolant as well as fission products entering the primary circuit in case of fuel cladding failure. Primary coolant circulates by means of natural convection.

The secondary system (consumer's circuit) is intended to generate a superheated steam from the feedwater (supplied by NPP turbo generator pumps) by means of heat transfer from the intermediate circuit coolant inside the steam generator. Secondary coolant circulates by means of natural convection.

Reactor Core

The reactor core consists of 265 fuel assemblies installed in the plates of the removable reactor screen at the points of a regular hexagonal lattice. The UNITHERM fuel element is designed as a cylindrical rod with four spacing ribs on its outer surface. The fuel is in the form of tiny blocks of UO₂ grains coated with zirconium and dispersed in a zirconium matrix. The gap between the fuel-containing matrix and the cladding is filled with silumin. A fuel element of such design has a high uranium content and radiation resistance. These features, taken together, make it possible to operate such fuel

elements during the whole specified core lifetime. A specific feature of the UNITHERM fuel cycle is the long and uninterrupted irradiation of fuel inside the reactor core throughout the reactor lifetime, without core refuelling. The metal ceramic (CERMET) fuel chosen for the UNITHERM is composed of UO₂ particles in a metallic (silumin or zirconium) matrix. This design is characterized by a high volume ratio of nuclear fuel; the use of the metallic matrix ensures minimum swelling and high thermal conductivity. Optimally shaped cladding is formed when the cladding is filled with the matrix composition.

Reactivity Control

The control element drive mechanisms (CEDMs) are designed to provide secure insertion of rods in the core by gravity for reactivity control. Locking devices are installed in the CEDM to avoid unauthorized withdrawal of control rods. Burnable absorbers are used to compensate the decrease of reactivity due to fuel burn-up, temperature effect and by motion of the reactivity control rods during periodic maintenance.

Reactor Pressure Vessel and Internals

UNITHERM is an integral type reactor with nuclear steam supply system (NSSS) equipment installed inside the reactor pressure vessel (RPV).

Reactor Coolant System

The UNITHERM primary cooling mechanism under normal operating condition and shutdown condition is by natural circulation of coolant. The heat energy released from the reactor core is transferred to the intermediate circuit coolant, which moves upward to flow outside the tubes of the helically coiled once-through steam generator (SG).

Steam Generator

The reactor employs a helically coiled once-through SG. Heat transfer from the reactor core to the intermediate circuit coolant occurs in the built-in once-through intermediate heat exchanger and heat transfer from the intermediate coolant to the consumer's circuit coolant – inside the SG. Both heat exchangers are made from titanium alloy. The intermediate heat exchanger has a structure of coil bundle consisting of 80 separate subsections that are united in 8 independent sections. Their supply and discharge tubes are connected to 8 pressure vessel steam generating modules installed on the reactor cover.

Pressurizer

Pressurizer of UNITHERM is a built-in structure of the upper plenum of the RPV.

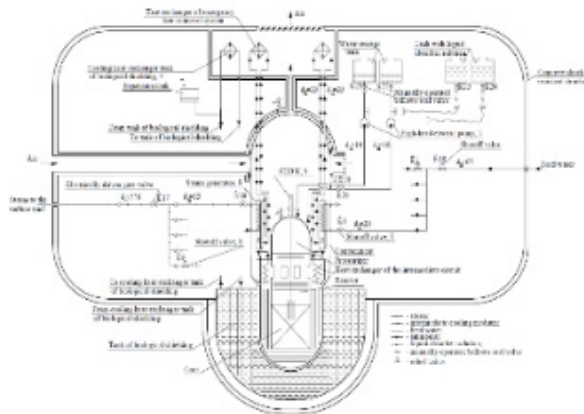


Figure 3. General view of the nuclear steam supply system and associated systems.

Instrumentation and Control Systems

Automatic System of control for technological processes of the NPP allows for:

- Safe operation of the NPP and electrical generation; protection from the violations of safe operation limits and conditions; prevention of accidents; mitigation of accident consequences; bringing the NPP back to the controlled and safe condition during accidents and after them.
- The Automatic Control System consists of functionally completed systems developed on the basis of programmatic-technical systems and instruments that were trialed in the NPP conditions or other analogous objects.

Technical appliances for the ACS are manufactured at the enterprises according to approbated technology and methods of testing and control while strictly observing the requirements of quality control.

5.1 Primary Circuit

5.2 Reactor Core and Fuel

5.3 Fuel Handling

5.4 Reactor Protection

5.5 Secondary Side

5.6 Containment/Confinement

5.7 Electrical, I&C and Human Interface

5.8 Unique Technical Design Features (if any)

6. Technology Readiness

SUMMARY FOR BOOKLET

Design and Licensing Status

Based on the experience of NIKIET and other Russian institutions and enterprises in the development of marine nuclear installations, the UNITHERM NPP may require no major research and technology

development activities for its deployment. Once an agreement with the user is reached and the technical assignment approved, it is estimated that 5 years will be required to finalize design development, licensing, construction and commissioning of the UNITHERM NPP, provided there are no financial or organizational constraints. The detailed design stage would include qualification of the core, heat exchangers, CEDMs and other components.

6.1 Deployed Reactors

6.2 Reactors under Licensing Review

6.3 Reactors in the Design Stage

7. Safety Concepts

SUMMARY FOR BOOKLET

The UNITHERM safety philosophy is to assure that the radiation impact on personnel, population and the environment under normal and design basis accidents is well below the limits prescribed by the current regulations. The UNITHERM design makes use of passive systems and devices based on natural processes without external energy supply. The design inherently eliminates potentially hazardous activities related to the core refuelling, as the reactor core refuelling will not be required in the plant service life. This further simplifies the operating technologies and enhances the proliferation resistance.

Engineered Safety System Approach and Configuration

The UNITHERM safety systems are based upon redundancy, diversity and the maximum use of the fail-safe systems. The UNITHERM employs passive safety systems and devices which do not require actuation (such as containment, independent heat removal system, etc.) or can be passively actuated (such as primary circuit systems and containment depressurization system). The reliability and safety of the UNITHERM reactor is significantly improved due to the elimination of the shut-off and isolation valves from the reactor pipelines, except for the user circuit, i.e., all systems are in continuous operation. The component cooling circuit is passively operated and continuous removal of heat from the reactor components enclosed in the containment is achieved efficiently. The structures of the UNITHERM NPP are designed to protect the reactor from extreme external events such as hurricanes, tsunami, aircraft impacts, etc. The reactor can be automatically shut down and brought to a safe state without exceeding the design limit. The UNITHERM also incorporates several design features and measures for protection from human errors and mitigation of the consequences of human errors or acts of malevolent.

Emergency Core Cooling System

An independent passive heat removal system is adopted which acts as a cooldown system in emergency shutdown of the reactor. During a postulated loss of coolant accident (LOCA) scenario, some primary coolant and steam-gas mixture from the pressurizer are discharged to the containment. The emergency core protection system is activated in response to the signals from pressure transducers. Coolant leakage continues until the pressure values in the reactor and containment are

equalized. The remaining coolant inventory in the reactor is sufficient to maintain circulation in the primary coolant circuit. The reactor is passively cooled via the intermediate circuit and the independent heat removal circuit, whereas the containment heat is removed by the component cooling system. Additionally, an active user circuit with feedwater supplied to the SG and steam-water mixture maybe utilized to increase the cooling rate. The iron-water biological shielding acts as a system of bubble tanks for cooling water storage. The shielding removes heat from the RPV, preventing a core melt in a postulated beyond design basis accident with reactor core voiding.

Containment System

The integral reactor for land-based deployment is placed inside the leak-tight containment, which is located within the concrete shock-resistant structure together with the biological shielding and reactor unit components. This structure enhances physical protection of the reactor unit from external impacts such as airplane crash, hurricane, tsunami, unauthorized access, etc.

1. Iron-water shielding tank;
2. Containment;
3. Shock-proof casing;
4. Cooldown system heat exchanger;
5. Safeguard vessel
6. The reactor

The containment system is capable of maintaining the primary coolant circulation as well as provides reactor cooldown and retention of radioactive products under the loss of primary circuit leak tightness. Passive safety systems for the removal of heat from the containment and biological shielding tanks are employed.

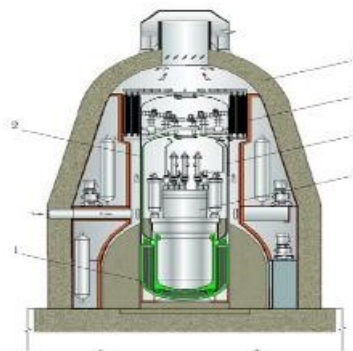


Figure 4. Containment system

Plant Safety and Operational Performances

Electrical output of the NPP with UNITERM-30 reactor equals to $N(e) - 6.6 \text{ MW}(e)$. Electrical voltage provided to the user grid – alternate 3-phase $10.5 \text{ kV} \pm 10 \%$, frequency $50 \pm 1 \text{ Hz}$. Basic regime of NPP operation lies within the power range from 20 to 100 % $N(e)$ providing a daily and annual load following. The speed of power augment and drop – $0.1 \% \text{ of } N(e)/\text{sec}$. Upon a customer request there may be foreseen additional provision of thermal power. Maximum rate of it could be up to 28

Gcal/hour.

- 7.1 Safety Philosophy and Implementation
- 7.2 Transient/Accident Behaviour

8. Fuel and Fuel Cycle

SUMMARY FOR BOOKLET

Fuel Cycle Approach

The duration of the campaign reactor core is 15 years.

Waste Management and Disposal Plan

Fuel handling is based on the traditional scheme implemented for the marine-based prototype reactor. Fuel processing and disposal will be performed at a specialized enterprise.

- 8.1 Fuel Cycle Options
- 8.2 Resource Use Optimization
- 8.3 Unique Fuel/Fuel Cycle Design Features

9. Safeguard & Physical Security

SUMMARY FOR BOOKLET

- 9.1 Safeguards
- 9.2 Security
- 9.3 Unique Safeguards and/or Security Features

10. Project Delivery & Economics

SUMMARY FOR BOOKLET

- 10.1 Project Preparation and Negotiation
- 10.2 Construction and Commissioning
- 10.3 Operation and Maintenance